










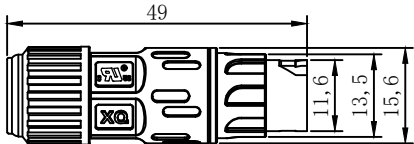

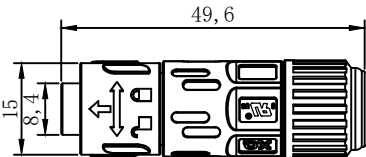


M12 线对线 自锁组装系列
M12 wire to wire self locking assembly series

描述 Description	组装式, 自锁, 焊接 Assembled, self locking, welding			组装式, 自锁, 焊接 Assembled, self locking, welding		
照片 Photographs						
尺寸 Dimensions	 49 11,6 13,5 15,6 公 Male			 49,6 15 8,4 母 Female		
料号 Part Number	芯数 Contacts	料号 Part Number		芯数 Contacts	料号 Part Number	
	2	XQ-B0-010201-01-XXXX CQC		2	XQ-B0-020201-01-XXXX CQC	
	3	XQ-B0-010301-01-XXXX CQC		3	XQ-B0-020301-01-XXXX CQC	
	4	XQ-B0-010401-01-XXXX CQC		4	XQ-B0-020401-01-XXXX CQC	
	5	XQ-B0-010501-01-XXXX CQC		5	XQ-B0-020501-01-XXXX CQC	
	6	XQ-B0-010601-01-XXXX CQC		6	XQ-B0-020601-01-XXXX CQC	
芯数 Core Number	 2 Pin	 3 Pin	 4 Pin	 5 Pin	 6 Pin	
额定电流/电压 Current/voltage rated	10A/300V	10A/300V	10A/300V	6A/250V	6A/250V	
接触件直径 Contact diameter	φ1.5			φ1.0		
防水等级 Water proof grade	IP68					
线材规格 Cable Gague	0.3mm ² -1.0mm ² (22-16AWG)					
线材外径 Cable OD	≤8mm					
工作温度 Operating temperature	尼龙 -40℃--+105℃					

M12 面板式 自锁组装系列

M12 Panel type self locking assembly series

描述 Description	后装公面板, 自锁, 焊接 Rear mounted male panel self locking crimping			前装公面板, 自锁, 焊接 Front mounted male panel self locking crimping	
照片 Photographs					
尺寸 Dimensions					
料号 Part Number	芯数 Contacts	料号 Part Number		芯数 Contacts	料号 Part Number
	2	XQ-B0-050201-03-XXXX CQC		2	XQ-B0-060201-03-XXXX CQC
	3	XQ-B0-050301-03-XXXX CQC		3	XQ-B0-060301-03-XXXX CQC
	4	XQ-B0-050401-03-XXXX CQC		4	XQ-B0-060401-03-XXXX CQC
	5	XQ-B0-050501-03-XXXX CQC		5	XQ-B0-060501-03-XXXX CQC
	6	XQ-B0-050601-03-XXXX CQC		6	XQ-B0-060601-03-XXXX CQC
芯数 Core Number	 2 Pin	 3 Pin	 4 Pin	 5 Pin	 6 Pin
额定电流/电压 Current/voltage rated	10A/300V	10A/300V	10A/300V	6A/250V	6A/250V
接触件直径 Contact diameter	φ1.5			φ1.0	
防水等级 Water proof grade	IP68				
线材规格 Cable Gauge	0.3mm ² -1.0mm ² (22-16AWG)				
线材外径 Cable OD	≤8mm				
工作温度 Operating temperature	尼龙 -40℃--+105℃				





M12 自锁 尼龙/PVC 注塑系列

M12 Self locking Nylon/PVC injection molding series

描述 Description	组装式, 自锁, 焊接 Assembled, self locking, welding				组装式, 自锁, 焊接 Assembled, self locking, welding			
照片 Photographs								
尺寸 Dimensions								
料号 Part Number	芯数 Contacts	料号 Part Number			芯数 Contacts	料号 Part Number		
	2	XQ-B0-010201-02-XXXX CQC			2	XQ-B0-020201-02-XXXX CQC		
	3	XQ-B0-010301-02-XXXX CQC			3	XQ-B0-020301-02-XXXX CQC		
	4	XQ-B0-010401-02-XXXX CQC			4	XQ-B0-020401-02-XXXX CQC		
	5	XQ-B0-010501-02-XXXX CQC			5	XQ-B0-020501-02-XXXX CQC		
	6	XQ-B0-010601-02-XXXX CQC			6	XQ-B0-020601-02-XXXX CQC		
芯数 Core Number								
额定电流/电压 Current/voltage rated	10A/300V	10A/300V	10A/300V	6A/250V	6A/250V			
接触件直径 Contact diameter	$\phi 1.5$				$\phi 1.0$			
防水等级 Water proof grade	IP68							
线材规格 Cable Gauge	0.3mm ² -1.0mm ² (22-16AWG)							
线材外径 Cable OD	$\leq 8\text{mm}$							
工作温度 Operating temperature	尼龙 -40℃--+105℃ / PVC-40℃--+80℃							

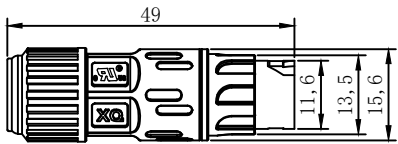
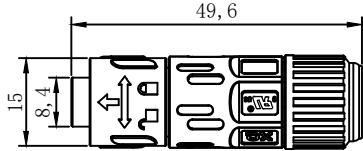


M12 线对线 自锁组装系列

M12 wire to wire self locking assembly series

<p>描述 Description</p>	<p>组装式, 自锁, 焊接 Assembled, self locking, welding</p>		<p>组装式, 自锁, 焊接 Assembled, self locking, welding</p>	
<p>照片 Photographs</p>				
<p>尺寸 Dimensions</p>	 <p>母 Female</p>		 <p>公 Male</p>	
<p>料号 Part Number</p>	<p>芯数 Contacts</p>	<p>料号 Part Number</p>	<p>芯数 Contacts</p>	<p>料号 Part Number</p>
	<p>2</p>	<p>XQ-B0-030201-01-XXXX CQC</p>	<p>2</p>	<p>XQ-B0-040201-01-XXXX CQC</p>
	<p>3</p>	<p>XQ-B0-030301-01-XXXX CQC</p>	<p>3</p>	<p>XQ-B0-040301-01-XXXX CQC</p>
	<p>4</p>	<p>XQ-B0-030401-01-XXXX CQC</p>	<p>4</p>	<p>XQ-B0-040401-01-XXXX CQC</p>
<p>芯数 Core Number</p>	 2 Pin		 3 Pin	
<p>额定电流/电压 Current/voltage rated</p>	<p>10A/300V</p>		<p>10A/300V</p>	
<p>接触件直径 Contact diameter</p>	<p>φ1.5</p>		<p>φ1.0</p>	
<p>防水等级 Water proof grade</p>	<p>IP68</p>			
<p>线材规格 Cable Gauge</p>	<p>0.3mm²-1.0mm² (22-16AWG)</p>			
<p>线材外径 Cable OD</p>	<p>≤8mm</p>			
<p>工作温度 Operating temperature</p>	<p>尼龙 -40℃-+105℃</p>			





M12 面板式 自锁组装系列

M12 Panel type self locking assembly series

<p>描述 Description</p>	<p>后装母面板，自锁，焊接 Post installed female panel self locking welding</p>		<p>前装母面板，自锁，焊接 Front mounting female panel self locking welding</p>	
<p>照片 Photographs</p>				
<p>尺寸 Dimensions</p>				
<p>料号 Part Number</p>	<p>芯数 Contacts</p>	<p>料号 Part Number</p>	<p>芯数 Contacts</p>	<p>料号 Part Number</p>
	<p>2</p>	<p>XQ-B0-070201-03-XXXX CQC</p>	<p>2</p>	<p>XQ-B0-080201-03-XXXX CQC</p>
	<p>3</p>	<p>XQ-B0-070301-03-XXXX CQC</p>	<p>3</p>	<p>XQ-B0-080301-03-XXXX CQC</p>
	<p>4</p>	<p>XQ-B0-070401-03-XXXX CQC</p>	<p>4</p>	<p>XQ-B0-080401-03-XXXX CQC</p>
<p>芯数 Core Number</p>	 <p>2 Pin</p>		 <p>3 Pin</p>	
<p>额定电流/电压 Current/voltage rated</p>	<p>10A/300V</p>		<p>10A/300V</p>	
<p>接触件直径 Contact diameter</p>	<p>φ1.5</p>		<p>φ1.0</p>	
<p>防水等级 Water proof grade</p>	<p>IP68</p>			
<p>线材规格 Cable Gague</p>	<p>0.3mm²-1.0mm² (22-16AWG)</p>			
<p>线材外径 Cable OD</p>	<p>≤8mm</p>			
<p>工作温度 Operating temperature</p>	<p>尼龙 -40℃--+105℃</p>			

M12 自锁 尼龙/PVC 注塑系列

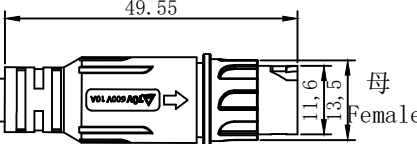M12 Self locking Nylon/PVC injection molding series

描述 Description	组装式, 自锁, 焊接 Assembled, self locking, welding		组装式, 自锁, 焊接 Assembled, self locking, welding	
照片 Photographs				
尺寸 Dimensions				
料号 Part Number	芯数 Contacts	料号 Part Number	芯数 Contacts	料号 Part Number
	2	XQ-B0-030201-02-XXXX CQC	2	XQ-B0-040201-02-XXXX CQC
	3	XQ-B0-030301-02-XXXX CQC	3	XQ-B0-040301-02-XXXX CQC
	4	XQ-B0-030401-02-XXXX CQC	4	XQ-B0-040401-02-XXXX CQC
芯数 Core Number	 2 Pin		 3 Pin	
额定电流/电压 Current/voltage rated	10A/300V		10A/300V	
接触件直径 Contact diameter	φ1.5		φ1.0	
防水等级 Water proof grade	IP68			
线材规格 Cable Gauge	0.3mm ² - 1.0mm ² (22-16AWG)			
线材外径 Cable OD	≤8mm			
工作温度 Operating temperature	尼龙 -40℃--+105℃ / PVC-40℃--+80℃			